

IQ4 RUN-WET® Metal Detector Conveyor Designed for Food & Packaging Industries

RUN-WET





The new RUN-WET® IQ4 Metal Detector Conveyor, is a complete IP69 rated system and has been designed using some of the key EHEDG principles offering the best cleaning standards to withstand harsh high-pressure and high-temperature cleaning regimes, whilst maximizing production efficiencies. This system is ideally suited to high-care food environments seeking microbes prevention and peace of mind.

Quicker to Clean

Designed to improve the efficacy of cleaning, RUN-WET® is particularly ideal for high-care environments where bacteria is key. All parts are IP69, designed to be accessible for quick and easy cleaning with no drying time needed, production can recommence immediately to free up cleaning resources for other tasks and increasing the overall production capacity.

Better Food Safety

The equipment is more hygienic to avoid bacterial contamination of the food, preventing a factory food safety risk, protecting the brand, satisfying COP and Food Safety Standards, and overall providing bacterial prevention reassurance.

Improved Reliability

Designed to full IP69 rating, the RUN-WET® specification is less susceptible to water ingress damage, protecting it against corrosion, keeping the machine operating at all times, and so reducing breakdown costs and the associated down-time costs. RUN-WET® is the ideal solution in high-care factories to ensure reliability, longevity and reduced overall ROI.

Key Design Features

Keeping high-care environments bacteria free with no compromise.





Open Frame



New Reject Bin




Cable Hoops



Faceted Covers



New Bearings



All Blue Plastics



IP69 Motor



IP69 Lamp & Sounder



IP69 Electrical Box



IP69 Pneumatics



Improved Surface Finish



Hygienic feet

Technical Specification


| Material of Construction | 304 Brushed Stainless Steel |
|-----------------------------|--|
| Conveyor Width | 300 400 mm (Pusher & Air-Blast) 300 400 500 600 mm (SOD) |
| Line Height Option | 750 - 1050 mm (±50 adjust) |
| Minimum Conveyor Length | 1400 mm (Pusher & Air-Blast) 900 mm (SOD) |
| Conveyor Length | 900 1000 1500 1800 2100 2400 2700 3000 mm Standard Lengths Bespoke available in 100 mm increments |
| Metal Detector | IQ4 Search Head with Variable Frequency Technology |
| Supply Voltages | 85 to 265 V, Single Phase 50/60 Hz, Neutral & Earth |
| Power Consumption | ~700 VA |
| Temperature Range | -10 to +40 °C (14 to 104 °F) |
| IP Rating | IP69 |
| Reject Options | Stop on Detect Pusher Air-Blast |
| Retail Compliance | Standard Retail Full Retail |


Automatic Reject Options


The IQ4 RUN-WET® Metal Detector Conveyor can be configured to suit a variety of different product applications. It is available in various reject configurations including:

- Belt-Stop / Stop On Detect
- Pusher
- Air-blast, single nozzle
- Air-blast, dual nozzle

Carriage Retract, Slack Bands, Power Decliners, and Diverters are available on request.

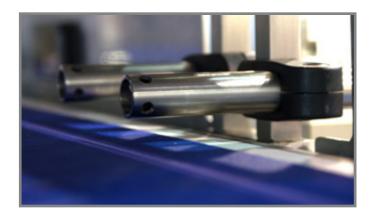

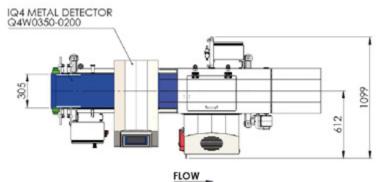

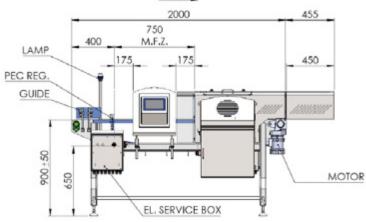

Example Model pictured: IQ4 RUN-WET with 350 x 200 Head, Pusher Reject and Full Retail Compliance, measurements in mm.

In association with







www.loma.com